





MOST LATEST TECHNOLOGY OF PACKAGING MACHINES



ISO 9001:2015 Certified Co.





MLT PACK SERVICES

www.mltpack.com



PRODUCTS WE CAN PACK

Products We Can Pack..



Biscuits



Cookies



Cup Cake



Chocolates



Wafer **Biscuits**



Peanut Bar



Soanpapdi



Rusk



Cup Cake With Tray



Biscuits



Papad



Switches



Detergent Soap



Noodles



Nutrition Bar

Our Achivements





An Introduction About Our Company





Mr. Narayan Kshirsagar (Director)



Mr. Sandeep Jarkad
(Director)

Our company MLT Pack Services started in 2003 by our Director Mr. Narayan Kshirsagar and Mr. Sandeep Jarkad. Both Partners are having more than 25 years of Experience in Manufacturing Packaging Machines.

We are manufacturer & suppliers of Packaging Machines for all types of Biscuits, Cookies, Cream Biscuits, Rusk/Toast, Cupcake, Slice Cake, Noodles, Chocolate bar, Peanut bar, Wafer biscuits, Energy Bar (Protein Bar), Detergent soap, Bath soap, and any other similar product having uniform shape like square, rectangular or round etc.

MLT Supplied all types of Packaging Machines to Parle Biscuits Pvt Ltd. Like Pillow Pack Machine, Canteen or Pile Pack, Family Pack Machines, Pillow Pack Machines for Cream Biscuits, Cross Pack Machines for Parle G, Overwrapping OR Secondary Wrapping Machines.

Till date Worldwide we have supplied more than 1800 Packaging Machines, out of that we have supplied more than 1000 machines to India's largest Biscuit Manufacturer Parle Biscuits Pvt. Ltd.

We also have Export more than 500 Packaging Machines to countries like Ghana, Kenya, Nigeria, Mozambique, Ethiopia, Ivory Coast, Mexico, Nepal, Cameroon, Bahrain, Bangladesh, Thailand, UAE etc.

We have Excellent manufacturing setup with various departments such as Production, HR, Marketing, Purchase, Account, Design, Quality Control, Store, Customer Care Department & Service Department.

To support production, we have a well-organized machine shop and over 100 suppliers on board.

Our Vision: We serve the Society & Nation Through the customers service & their satisfaction.



On Edge Pillow Pack Machine With 7 Servo Motors (7-Axis)



Application: This Model Of Packing Machine Is Applicable For Packing Of Nacked Biscuit On Edge In Pillow Pack Style. So This Machine Applicable To Pack Glucose, Monaco, Krack Jack, Marrie & Cookies Biscuits.

MODEL – On Edge Pillow Pack Machine

MODEL NO: MLT/OEPP 150 DC

MODEL NO: MLT/OEPP 200 DC with 6 line Automation System

DIMENSION FOR GENERAL ARRANGEMENT				
MODEL Length Height Width Appox Weight				
PILLOW PACK	15.5 FT	6 FT	4 FT	1500 Kg

TECHNICAL DATA			
Maximum product Length /Dia	60 mm		
Minimum products Length	40 mm		
Maximum Width of the products	60 mm		
Minimum Width of the products	25 mm		
Max./ Min. Stack Length	175 mm /40 mm		
Maximum Speed (OEPP 150 DC) (Depending upon the Products & Stack Height)	130 to 150 PPM		

ELECTRICAL DATA				
Power 3 Phase	440V with neutral 2 K.W			
Main Motor	2 HP, 3 Phase, 1440 RPM			
Frequency Drive 440 V 2 H.P	Input Output 3 Phase 3 Phase			
Heater : 110 V	150 Watts for jaw			
110 V	200 Watts for Disc Heater			
Transformer	30 Amp			
Power Consumption	415 VAC –2500) watt (2.5 KW)		



WRAPPER MATERIAL				
Maximum width of the packing materials	450 mm			
Minimun width of the packing materials	150 mm			
Maximum Reel Dia	400 mm			
Heat Sealable	BOPP			







Family Pack Machine with 1 Servo Motor (1-Axis)





Application: This Model Is Applicable To Pack Biscuits In Multi Lines (2,3,4,5, Line) In Multi Line Machine Can Pack Glucose, Marie, Salty Biscuits (like Monaco & Krack Jack)

MODEL NAME- FAMILY PACK MACHINE WITH 1 SERVO MOTOR (1-AXIS)

MODEL NO: MLT/FP 40

DIMENSION FOR GENERAL ARRANGEMENT				
MODEL Length Height Width Appox Weight				
FAMILY PACK	19.5 FT	5.6 FT	4.8 FT	1200 Kg

TECHNICAL DATA				
Maximum product Length /Dia	60 mm			
Minimum product Length /Dia	48 mm			
Maximum width of the products	60 mm			
Minimum width of the products	30 mm			
Maximum Stack Length	150 mm			
Maximum Speed (Depending upon the products)	50 PPM for 2 Rows 33 PPM for 3 Rows 25 PPM for 4 Rows			

ELECTRICAL DATA				
Power 3 Phase 440V with neutral 2 K		al 2 K.W		
Main Motor	2 HP, 3 Phase, 1440 RPM			
Frequency Drive	Input Output			
440 V 2 H.P.	3 Phase	3 Phase		
Heater : 110 V	250 Watts for jaw			
110 V	200 Watts for Disc Heater			
Transformer	30 Amp, 110 V			
Power Consumption	415 VAC – 3000) watt (3 KW)		

WRAPPER MATERIAL				
Maximum width of the packing materials	450 mm			
Minimun width of the packing materials	150 mm			
Maximum Reel Dia	400 mm			
Heat Sealable	ВОРР			









Application: This Model Applicable To Pack Biscuits In Single Pile, Two Piles & Three Piles Or Four Piles.

MODEL NAME – HIGH SPEED CANTEEN PACK MACHINE WITH 3 SERVO MOTOR (3-AXIS) MODEL NO. – MLT/ CP 350

DIMENSION FOR GENERAL ARRANGEMENT				
MODEL	Length	Height	Width	Appox Weight
HIGH SPEED CANTEEN PACK MACHINE	14 FT	5.6 FT	4 FT	1000 Kg

TECHNICAL DA	ГΑ
Maximum product Length/Dia	60 mm
Minimum product Length/Dia	48 mm
Maximum Width of the Products	60 mm
Minimum Width of the Products	25 mm
Maximum Stack Height of products	30 mm
Minimum Stack Height of products	28 mm
Maximum Speed	
CP 350 – 1 Pile	300 PPM
2 Pile	150 PPM
3 Pile	100 PPM

ELECTRICAL DATA				
Power 3 Phase	440V with neutral 2 K.W			
Main Motor	2 HP, 3 Phase			
Frequency Drive	Input	Output		
440 V 2 H.P	3 Phase	3 Phase		
Heater : 110 V	250 Watts for jaw			
110 V	200 Watts for Disc Heater			
Transformer	30 Amp			
Power Consumption	415 VAC – 25	600 watt (KW)		

WRAPPER MATERIAL		
Maximum width of the packing materials	280 mm	
Minimun width of the packing materials	150 mm	
Maximum Reel Dia.	400 mm	
Heat Sealable	BOPP	





Application: This Model Applicable To Pack All Types Of Cream Biscuits In Round & Rectangle Shape Without Tray.


MODEL NAME - PACKING MACHINE FOR CREAM BISCUIT WITH 1 & 2 SERVO MOTOR MODEL NO. - MLT/OEPPLC-DC150

DIMENSION FOR GENERAL ARRANGEMENT				
MODEL Length Height $Width/L$ Conv. length Appox Weight				
MLT/OEPPLT- DC150	14 FT	5.6 FT	4 Ft / 12FT	1500 Kg

TECHNICAL	DATA
Maximum product Length/Dia	60 mm
Minimum product Length /Dia	40 mm
Maximum Width of the products	50 mm
Minimum Width of the products	30 mm
Max./ Min. Stack Length for MLT/OPPLT- DC 150	170/40 mm (Double line conveyor)
Minimum Stack Height of product	28 mm
Maximum Speed (DC 150) (Depending upon the products)	90 -110 PPM

WRAPPER MATERIAL		
Maximum width of the packing materials	450 mm	
Minimun width of the packing materials	150 mm	
Maximum Reel Dia.	325 mm	
Heat Sealable	ВОРР	

ELECTRICAL DATA				
Power 3 Phase	ase 440V with neutral 2 K.W			
Main Motor	2 HP, 3 Phase			
Frequency Drive	Input	Output		
440 V 2 H.P	3 Phase	3 Phase		
Heater : 110 V	150Watts for	jaw		
110 V	200 Watts for	Disc Heater		
Transformer	30 Amp			
Power	415 VAC – 25	500 watt (2.5 KW)		
Consumption				











Secondary Wrapping Machine with 1 Servo Motor (1-Axis)



Application: This Model Applicable To Pack Prewrapped 8/10/12/14 Packets With Transparent Paper

MODEL NAME – SECONDARY WRAPPING MACHINE WITH 1 SERVO MOTOR (1-AXIS)

DIMENSION FOR GENERAL ARRANGEMENT				
MODEL	Length	Height	Width	Appox Weight
Secondary Wrapping Machine	16 FT	5.4 FT	9.5 FT	1500 Kg

TECNICAL DATA				
Maximum product Length/ Dia	60 mm			
Minimum product Length	43 mm			
Maximum Width of the Products	43 mm			
Minimum Width of the Products	36 mm			
Maximum Stack Length	280 mm			
Maximum Speed (Depending upon the products)	40 PPM			

ELECTRICAL DATA				
Power 3 Phase	440V with neutral 2 K.W			
Main Motor	2 HP, 3 Phase			
Frequency Drive	Input	Output		
440 V 2 H.P	3 Phase	3 Phase		
Heater : 110 V	250 Watts for ja	aw		
110 V	200 Watts for D	Disc Heater		
Transformer	30 Amp			
Power Consumption	415 VAC – 300	00 watt (3KW)		

WRAPPER MATERIAL		
Maximum width of the packing materials	700 mm	
Minimun width of the packing materials	320 mm	
Maximum Reel Dia	325 mm	
Heat Sealable	ВОРР	









Rusk / Toast Packing Machine With 4 Servo Motors (4-axis)





Application: This Model Is Applicable To Pack Rusk / Toast In Single Line, Two Lines & Three Lines


MODEL – PACKING MACHINE FOR RUSK OR TOAST WITH 4 SERVO MOTORS (4-AXIS) **MODEL NO.** -MLT/RUSK 30

DIMENSION FOR GENERAL ARRANGEMENT				
MODEL	Length	Height	Width	Appox Weight
RUSK PACKING MACHINE	14 FT	5.6 FT	4.8 FT	1200 Kg

TECHNICAL	DATA
Maximum product Length	75 mm
Minimum product Length	60 mm
Maximum Width of the products	45 mm
Minimum Width of the products	30 mm
Maximum Stack Length	170 mm
MaximumSpeed (Depending upon the products)	70 PPM for 1 LINE 40 PPM for 2 LINE 25 PPM for 3 LINE

ELECTRICAL DATA				
Power 3 Phase	440V with neutral 2 K.W			
Main Motor	2 HP, 3 Phase			
Frequency Drive	Input Output			
440 V 2 H.P	3 Phase 3 Phase			
Heater : 110 V	250 Watts for jaw			
110 V	200 Watts for Disc Heater			
Transformer	30 Amp			
Power Consumption	415 VAC – 3000 watt (3KW)			

WRAPPER MATERIAL			
Maximum width of the packing materials	450 mm		
Minimun width of the packing materials	150 mm		
Maximum Reel Dia.	325 mm		
Heat Sealable	ВОРР		











Tray Pack Machine with 3 Servo Motor (3-Axis)



Application: To Pack All Types Of Cream Biscuits, Slice Cake, Cup Cake & Any Other Similar Product Having Shape Rectangular, Square Or Half Round In Tray Or Without Tray

Model Name – TRAY PACK MACHINE WITH 3 SERVO MOTORS (3-Axis) **Model No.** – MLT/TP - 60

DIMENSION FOR GENERAL ARRANGEMENT				
MODEL	Length	Height	Width	Appox Weight
TRAY PACK MACHINE	14 FT	5.6 FT	4 Ft	1000 Kg

TECHNICAL DATA				
Maximum Length of Tray	250 mm			
Minimum Length of Tray	50 mm			
Maximum Width of Tray	75 mm			
Minimum Width of Tray	30 mm			
Maximum / Minimum Height of Tray	50/25 mm			
Maximum Speed	60 PPM			

WRAPPER MATERIAL		
Maximum width of the packing materials	300 mm	
Minimun width of the packing materials	150 mm	
Maximum Real Dia.	325 mm	
Heat Sealable	BOPP	

ELECTRICAL DATA				
Power 3 Phase	440V with neutral 2 K.W			
Main Motor	2 HP, 3 Phase			
Frequency Drive	Input Output			
440 V 2 H.P	3 Phase 3 Phase			
Heater : 110 V	150 Watts for jaw			
110 V	200 Watts for Disc Heater			
Transformer	30 Amp			
Power Consumption	415 VAC –2500 watt (2.5 KW)			

NOTE: If Width of Tray more than 75 mm then Machine will change











Application: This Model Is Applicable For Sandwiching & To Pack All Types Of Cream Biscuits In Round & Rectangular Shape Without Tray

MODEL NAME - CREAM SANDWICHING WITH ON EDGE PACKING MACHINE WITH 4 SERVO (4-Axis)

DIMENSION FOR GENERAL ARRANGEMENT				
MODEL	Length	Height	Width	Appox Weight
On Edge Cream Sandwiching Machine	24 FT	5.6 FT	12 FT	1600 KG

TECHNICAL DATA			
Maximum product Length	60 mm		
Minimum product Length	40 mm		
Maximum Width of the products	43 mm		
Minimum Width of the products	25 mm		
Max./ Min. Stack Length	100 / 60 mm		
Maximum Speed (DC 150) (Depending upon the products)	150 PPM (for 5 Sandwiches)		

ELECTRICAL DATA				
Power 3 Phase	440V with neutral 2 K.W			
Main Motor	2 HP, 3 Phase			
Frequency Drive 440 V 2 H.P	Input Output 3 Phase 3 Phase			
Heater : 110 V 110 V	250Watts for jaw 200 Watts for Disc Heater			
Transformer	30 Amp			
Power Consumption	415 VAC – 2500 watt (2.5 KW)			

WRAPPER MATERIAL			
Maximum width of the packing materials	450 mm		
Minimun width of the packing materials	150 mm		
Maximum Reel Dia.	325 mm		
Heat Sealable	ВОРР		











2 Line Creamer With Canteen Pack / Pile Pack Machine



Application: This Model Is Applicable To Make Sandwich & Pack Biscuits In 1 To 5 Piles (for 1 Or 2 Biscuits)

MODEL NAME – 2 Line Creamer With Canteen Pack / Pile Pack Machine

DIMENSION FOR GENERAL ARRANGEMENT				
MODEL	Length	Height	Width	Appox Weight
Cream Biscuits Sandwiching Pile Pack Machine	28 FT	5.6 FT	12 FT	2000 KG

TECHNICAL DATA		
Maximum product Length	43 mm	
Minimum product Length	43 mm	
Maximum Dia of product	43 mm	
Maximum Width of the Products	43 mm	
Minimum Width of the Products	25 mm	
Maximum Stack Height of products	24 mm	
Minimum Stack Height of products	12 mm	
Maximum Speed		
- 1 Pile	300 PPM	
2 Pile	250 PPM	
3 Pile	200 PPM	

ELECTRICAL DATA				
Power 3 Phase	440V with neutral 2 K.W			
Main Motor	2 HP, 3 Phase			
Frequency Drive	Input	Output		
440 V 2 H.P	3 Phase	3 Phase		
Heater : 110 V	250 Watts for jaw			
110 V	200 Watts for Disc Heater			
Transformer	30 Amp			
Power Consumption	415 VAC – 25	00 watt (KW)		

WRAPPER MATERIAL		
Maximum width of the packing materials	280 mm	
Minimun width of the packing materials	150 mm	
Maximum Reel Dia.	400 mm	
Heat Sealable	BOPP	







Products We Can Pack



















Company Infrastructure










We developed various Automation Projects for Biscuits Industries

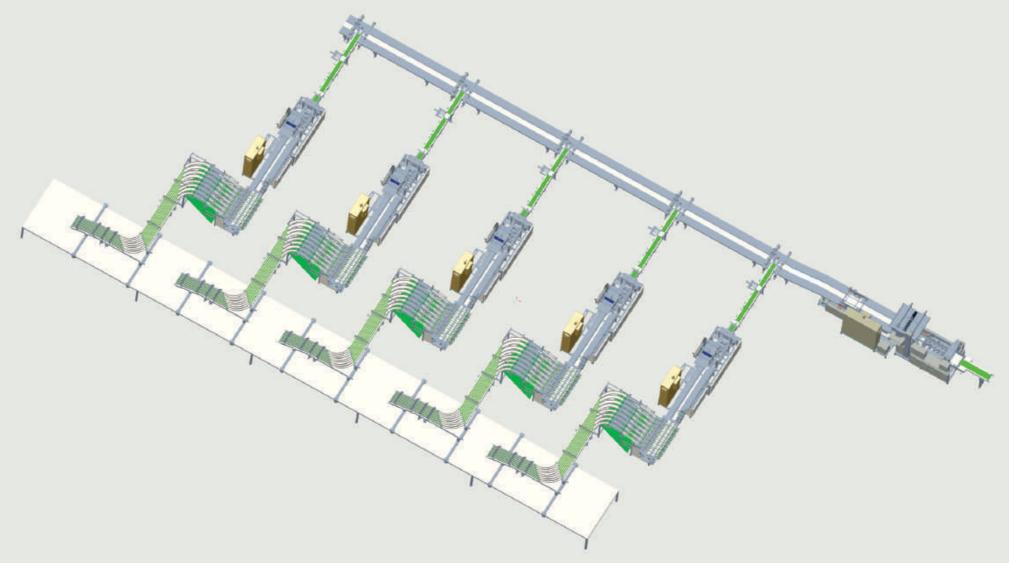

We developed various Packaging Machines as below:

- Pillow Pack Machine for biscuits with 6 line Automation system.
- M Canteen Pack machine for biscuits with PLC & 3 servo motors with Auto splicing system,
- Canteen Pack machine for biscuits with 4 Line Automation.
- Pillow Pack machine for biscuits with PLC & 7 servo motors with Auto splicing system.
- Family Pack machine for biscuits with PLC & 1 servo motor with Auto splicing system.
- Horizontal Flow Wrap Machine for Peanut Bar, Soaps, Wafer Biscuits, Electrical Switches, Sanitary Products, Bearings, Sonpapadi, Scrubs and any other Similar Products having Shape Round, Rectangle or Square.

- Family Pack machine for biscuits with PLC & 5 servo motors with 4 & 6 Line Automation,
- Secondary Wrapping Machine for biscuits for 8/10/12/14 packets with transparent paper.
- **▶** Secondary Wrapping Machine with Primary to Secondary Automation.
- Wafer Biscuit Packing Machine with PLC & 4 servo motors with Auto splicing system.
- Noodles Packing Machine with PLC, 6 servo motors with Auto splicing & with smart conveyor system.
- We have also developed online D Cut Machine for Secondary Wrapping.

We also supply complete automation system with smart conveyor for various biscuits industries.





MLT PACK SERVICES

Factory & Off: Plot No. B 168, MIDC, Sinnar, Tal. Sinnar, Dist. Nashik- 422113, Maharashtra, INDIA Tel.No.: +91-22551-230384 Mo. No.: +91 7720037928 / +91 9422944645 / +91 9422944646

Email: sales@mltpack.com | customercare@mltpack.com

Website: www.mltpack.com